


ORDJ6.3 Splicing and Patching Shelf

Prysmian Part Number: *See Table Below*

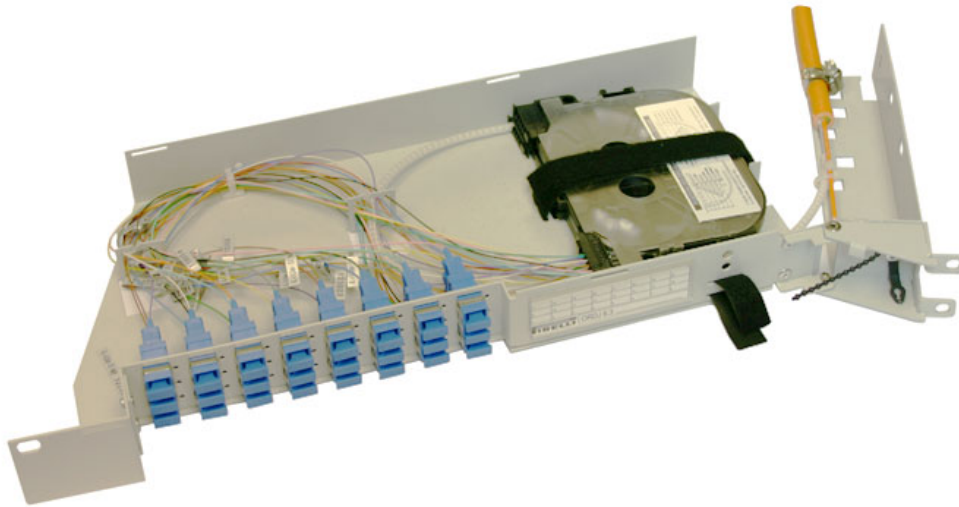

The OAsys ORDJ6.3 Splicing and Patching Shelf is a 1U shelf allowing the connection of up to 24 fibres onto a Uniter Panel. The shelf is compatible with 19" and ETSI rack practices. Cables enter the shelf on the right hand side and pigtailed exit the unit on the right hand side.

The can be supplied with the pigtailed and uniters pre-installed to save installation time. It can also be supplied without pigtailed and adapters pre-installed.

Features and Benefits

- Provides management of fibres through Splicing and Patching.
- Splicing and bare fibre excess storage is performed inside a tray protected by a cover.
- Compatible with 19" rack practice (1U) for direct mounting.
- Compatible with ETSI rack practice (2SU) using front mounting adapter plates (supplied).
- Cable entry position on right hand side. Pigtailed exit on right hand side.
- Can be supplied with 12 or 24 uniters and pigtailed pre-installed onto the splice trays ready for connection to cable fibres, or without any adapters and pigtailed installed.
- The shelf can accommodate a variety of different connector types.
- Shelf pivots outwards to enable easy access to the splice trays.
- Cables of up to 25mm in diameter can be accommodated.

Kit Contents

- Splice Trays
- Pigtailed
- Adapters
- ETSI Mounting Brackets
- Cable Fixing and Routing components

Additional Items

- Splice Protectors

Part Numbers

Supplied with pigtailed and adapters

Connector Type	Part Number	
	12 Fibre	24 Fibre
FC / UPC	XEXSC00435	XEXSC00358
FC / APC	XEXSC00436	XEXSC00359
SC / UPC	XEXSC00437	XEXSC00360
SC / APC	XEXSC00438	XEXSC00361
ST	XEXSC00439	XEXSC00362
E2000 / UPC	XEXSC00440	XEXSC00363
E2000 / APC	XEXSC00441	XEXSC00364
LC / UPC	XEXSC00460	XEXSC00462
LC / APC	XEXSC00461	XEXSC00463

Supplied without pigtailed and adapters

Connector Type	Part Number	Part Number
FC / ST	XEXSC00578	XEXSC00580
SC / E2000 / LC	XEXSC00579	XEXSC00581

Technical Data

- Number of splice trays: 1 or 2
- Max number of output patchcords: 12 or 24
- Max Cable Diameter: 25mm
- Required space envelope (mm): (w) 481 x (d) 230 x (h) 44
- Operating temperature: -20°C to + 50°C (5 to 95% RH)
- Material:-
 - Metalwork: Mild Steel
 - Plastics: FR Polymer
- Finish:-
 - Metalwork: Painted light grey (RAL 7035)
 - Plastics: Grey
- Testing:-
 - Optical: Tested at 1310nm and 1550nm
 - Dry heat: BS EN 60068-2-2 Test Bb
 - Damp heat: IEC 60068-2-3: 1969
 - Change of temperature: IEC 60068-2-14: 1984
 - Vibration: IEC 60068-2-6: 1995
 - Shock: IEC 60068-2-27: 1987

Logistics

- Packing Dimensions (mm): (w) 560 x (d) 290 x (h) 175
- Packed Weight (kg): 3.95
- Net weight (kg): 3.55

Pigtail Technical Data

Pigtails are supplied with either xx/UPC or xx/APC connectors.

xx/UPC connectors can be used in cases where xx/PC or xx/SPC connectors are required.

	UPC	APC
• Insertion Loss (max)	0.3 dB	0.3 dB
• Return Loss (min)	50 dB	60 dB

Additional Items

Heatshrink Splice Protectors


OAsys splice protectors are used to protect the fibre splice. They are 2.2mm in diameter and 45mm in length.



Prismian Part No. - XPESC00053 (pack of 50)
- XKTSC00050 (pack of 12)

Crimp Splice Protector Kit

The OAsys Crimp Splice Protector Kit is used to convert the splice tray in an OAsys ORDJ6.3 to accommodate crimp splice protectors. One kit is required for each splice tray. The kit contains an insert to house the splice protectors and 12 crimp splice protectors.



Prismian Part No. - XKTSC00020

Prismian Telecom Cables & Systems UK Ltd, Chickenhall Lane, Bishopstoke, Hants SO50 6YU, UK

Technical Enquiries +44 (0) 2380 608760 Fax Number +44 (0) 2380 608769

© PRYSMIAN 2005. All Rights Reserved.

The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Prismian. The information is believed correct at the time of issue. Prismian reserves the right to amend this specification without notice. This specification is not contractually valid unless specifically authorised by Prismian.

Issue 01, October 2005
Ref: RM004