

## Blown Fibre Gas Seal Unit

Prysmian Part Number: *XBFSC00150*



The OAsys Blown Fibre Gas Seal Unit (BFGSU) is typically used in business premises or entry to apartment blocks. This is a wall mounted unit that is positioned internally at the cable entry point. Incoming external blown tube cables are connected to internal blown tube cables using gas sealing connectors. These connectors are used to seal both populated (with blown fibre bundle) and unpopulated blown tubing.

The BFGSU is used for internally fed cable or with an OAsys CLI Unit for cables entering through the fabric of the wall.

### Features and Benefits

- Compact, low profile, wall mounted unit typically used in business premises.
- Removable cover for easy access.
- Tamperproof cover security screws available as an option (refer to OAsys Customer Plant Upgrade Kits).
- Unit manufactured from fire resistant material to UL94-V0.
- Supplied with components to mount unit to a wall and secure external cable.
- Gas sealing connectors used to provide connection of external and internal blown tubing. Connectors provide gas tight seal for populated (with Sirocco® blown fibre bundle) and unpopulated tubes. Gas seal connectors are supplied separately.
- Gas tight sealing caps used to terminate unused external cable tubes. Gas sealing caps supplied separately.
- Accommodates up to one 12 tube external Sirocco® Blown Cable, and up to two Internal blown distribution cables (e.g. 2 x 4 tube internal cables or other combinations up to a maximum of 12 tubes).
- For external cables fed via the wall fabric, an interface to an OAsys Internal Customer Lead In is provided.
- Remote toning point is provided for connection to metallic moisture barrier of the external cable.

### Kit Contents

- Wall fixings
- Wall fixing template
- Toning connector
- Sealing resin.

**NOTE:** Gas Block Connectors and Tube Sealing Caps are not supplied in kit.

### Additional Items

- Customer Lead-in Unit (Business version)
- Gas Block Connector
- Tube Sealing Caps


## Technical Data

- Maximum capacity:-
  - External cable: One 12 tube cable
  - Internal cable: Two cables to a maximum of 12 tubes
- Required space envelope (mm): (w) 96 x (d) 63 x (h) 253
- Operating temperature: -20°C to + 50°C (5 to 95% RH)
- Material: FR ABS
- Colour: Light grey
- Flammability rating: UL94-V0
- Testing:-
  - Optical: Tested at 1310nm and 1550nm
  - Dry heat: BS EN 60068-2-2 Test Bb
  - Damp heat: IEC 68-2-3
  - Change of temperature: IEC 68-2-14

## Logistics

- Packing Dimensions (mm): (l) 320 x (w) 120 x (d) 90
- Packed Weight (kg): 0.7
- Net weight (kg): 0.65

## Application Information

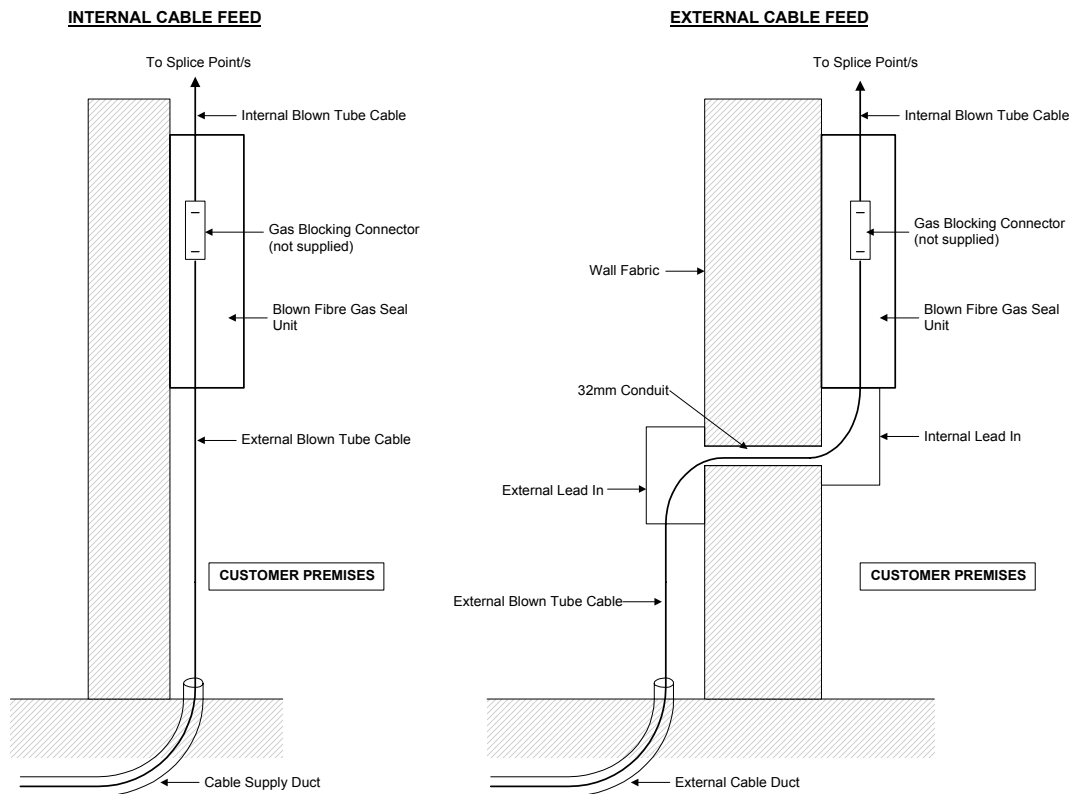

Prysmian Telecom Cables & Systems UK Ltd, Chickenhall Lane, Bishopstoke, Hants SO50 6YU, UK

Technical Enquiries +44 (0) 2380 608760 Fax Number +44 (0) 2380 608769

© PRYSMIAN 2005. All Rights Reserved.

The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Prysmian. The information is believed correct at the time of issue. Prysmian reserves the right to amend this specification without notice. This specification is not contractually valid unless specifically authorised by Prysmian.

**Issue 01, December 2005**  
**Ref: WM009**

---

## Additional Items

### Customer Lead-in Unit (Business version)

The OAsys Customer Lead In enables external cable to be passed through the building fabric from an outside wall and is typically used in business premises. The Customer Lead In comprises of two separate units mounted either side of the wall and connected by a length of conduit. This product can be used with Sirocco® Blown Fibre tubing or conventional optical cable.



*Prysmian Part No. – XBFSC00151*

---

### Tube Sealing Cap

Used for sealing unused 5mm Blown Fibre tubes within an OAsys Blown Fibre Gas Seal Unit. The cap provides a gas tight seal to the unpopulated tubes.



*Prysmian Part No. – XAGSC00406 (pack of 10)*

---

### Gas Block Connector

Used for gas sealing a populated Blown Fibre tube within the OAsys Blown Fibre Gas Seal Unit. The connector simply push fits over the tube providing a gas tight seal for tubes (unpopulated) and tubes with installed Blown Fibre bundle (populated). The device allows fibre to be 'blown through' into the customer premises. A sealing device is activated externally to seal the tube/bundle.



*Prysmian Part No. – XAGSC00404 (pack of 10)*

---